
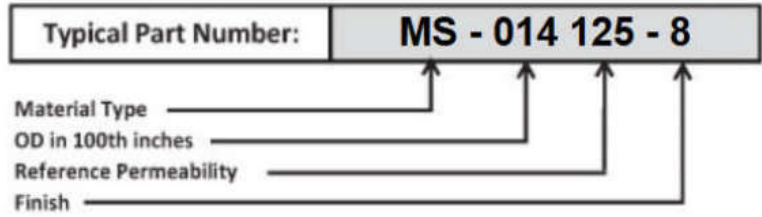


# Спецификация магнитных сердечников Sendust MS-014xxx-8

(Информация с сайта <http://micrometalsarnoldpowdercores.com>)



## Physical Dimensions

OD	Bare Core Nominal	3.56 mm	0.140 in
	Coated Core (max)	3.76 mm	0.148 in
ID	Bare Core Nominal	1.78 mm	0.070 in
	Coated Core (max)	1.52 mm	0.060 in
Ht	Bare Core Nominal	1.52 mm	0.060 in
	Coated Core (max)	1.73 mm	0.068 in

## Magnetic Dimensions

Ae	Effective Magnetic Cross Section	0.01 cm <sup>2</sup>
Le	Effective Magnetic Path Length	0.81 cm
Ve	Effective Core Volume	0.01 cm <sup>3</sup>
WA	Minimum Effective Window Area	0.01 cm <sup>2</sup>
SA	Surface Area	0.523 cm <sup>2</sup>
MLT	Mean Length Per Turn	0.646 cm

## Permeability

## Part Numbers

Reference Permeability	A <sub>L</sub> Value (nH/N <sup>2</sup> )	Super-MSS™ Sendust	MPP Molypermalloy	FluxSan™ Silicon Iron	Hi-Flux™ Nickle Iron	Optilloy™ Optimized Alloy
14μ	3	MS-014014-8	MP-014014-8	FS-014014-8	HF-014014-8	OP-014014-8
26μ	5.5	MS-014026-8	MP-014026-8	FS-014026-8	HF-014026-8	OP-014026-8
40μ	9	MS-014040-8		FS-014040-8		OP-014040-8
60μ	13	MS-014060-8	MP-014060-8	FS-014060-8	HF-014060-8	OP-014060-8
75μ	16	MS-014075-8		FS-014075-8		OP-014075-8
90μ	19	MS-014090-8		FS-014090-8		OP-014090-8
125μ	26	MS-014125-8	MP-014125-8		HF-014125-8	OP-014125-8
147μ	31	MS-014147-8	MP-014147-8		HF-014147-8	
160μ	33	MS-014160-8	MP-014160-8		HF-014160-8	
173μ	36		MP-014173-8			
205μ	43		MP-014205-8			
<b>Approx Unit Weight:</b>		0.06 g	0.07 g	0.07 g	0.07 g	0.07 g

## Test Conditions

Winding	N=30, #36 AWG
Frequency	10 kHz
Voltage	0.001 V
A <sub>L</sub> Tolerance	±8% (±15% Super-MSS)

## Coating/Packaging Information

Coating Type	Parylene N
Voltage Breakdown	500 Vrms
Unit	0.1 mA, 5 s
Package Quantity	36,000 Pcs/Box

## Winding Table

Wire Size	AWG	30	32	34	36	38	40	42	44	-	-	-
	mm	0.250	0.200	0.160	0.125	0.100	0.080	0.063	0.050	-	-	-
Single Layer	Turns	11	15	19	25	31	40	50	63	-	-	-
	Rdc(Ω)	24.1 m	52.2 m	105.1 m	219.9 m	433.7 m	890.0 m	1.8	3.5	-	-	-
Full Winding	Turns	12	18	28	43	67	103	159	247	-	-	-
	Rdc(Ω)	26.2 m	62.6 m	154.9 m	378.3 m	937.3 m	2.3	5.6	13.9	-	-	-